

1N5817, 1N5818, 1N5819

1N5817 and 1N5819 are Preferred Devices

Axial Lead Rectifiers

...employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low V_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16" from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: 1N5817, 1N5818, 1N5819

MAXIMUM RATINGS


Please See the Table on the Following Page



ON Semiconductor®


<http://onsemi.com>

SCHOTTKY BARRIER RECTIFIERS 1.0 AMPERE 20, 30 and 40 VOLTS

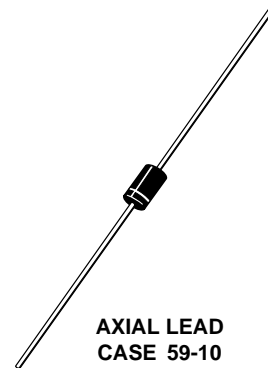

AXIAL LEAD
CASE 59-10
DO-41
PLASTIC

MARKING DIAGRAM



1N581x = Device Code
x = 7, 8 or 9

ORDERING INFORMATION

| Device | Package | Shipping |
|----------|------------|------------------|
| 1N5817 | Axial Lead | 1000 Units/Bag |
| 1N5817RL | Axial Lead | 5000/Tape & Reel |
| 1N5818 | Axial Lead | 1000 Units/Bag |
| 1N5818RL | Axial Lead | 5000/Tape & Reel |
| 1N5819 | Axial Lead | 1000 Units/Bag |
| 1N5819RL | Axial Lead | 5000/Tape & Reel |

Preferred devices are recommended choices for future use and best overall value.

1N5817, 1N5818, 1N5819

MAXIMUM RATINGS

| Rating | Symbol | 1N5817 | 1N5818 | 1N5819 | Unit |
|--|---------------------------------|--------------------|--------|--------|------------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V_{RRM} V_{RWM} V_R | 20 | 30 | 40 | V |
| Non-Repetitive Peak Reverse Voltage | V_{RSM} | 24 | 36 | 48 | V |
| RMS Reverse Voltage | $V_{R(RMS)}$ | 14 | 21 | 28 | V |
| Average Rectified Forward Current (Note 1) ($V_{R(equiv)} \leq 0.2 V_R(dc)$, $T_L = 90^\circ C$, $R_{\theta JA} = 80^\circ C/W$, P.C. Board Mounting, see Note 2, $T_A = 55^\circ C$) | I_O | 1.0 | | | A |
| Ambient Temperature (Rated $V_R(dc)$, $P_{F(AV)} = 0$, $R_{\theta JA} = 80^\circ C/W$) | T_A | 85 | 80 | 75 | $^\circ C$ |
| Non-Repetitive Peak Surge Current (Surge applied at rated load conditions, half-wave, single phase 60 Hz, $T_L = 70^\circ C$) | I_{FSM} | 25 (for one cycle) | | | A |
| Operating and Storage Junction Temperature Range (Reverse Voltage applied) | T_J, T_{stg} | -65 to +125 | | | $^\circ C$ |
| Peak Operating Junction Temperature (Forward Current applied) | $T_{J(pk)}$ | 150 | | | $^\circ C$ |

THERMAL CHARACTERISTICS (Note 1)

| Characteristic | Symbol | Max | Unit |
|---|-----------------|-----|--------------|
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 80 | $^\circ C/W$ |

ELECTRICAL CHARACTERISTICS ($T_L = 25^\circ C$ unless otherwise noted) (Note 1)

| Characteristic | Symbol | 1N5817 | 1N5818 | 1N5819 | Unit |
|--|--------|----------------------|-----------------------|--------------------|------|
| Maximum Instantaneous Forward Voltage (Note 2) ($i_F = 0.1 A$) ($i_F = 1.0 A$) ($i_F = 3.0 A$) | V_F | 0.32 0.45 0.75 | 0.33 0.55 0.875 | 0.34 0.6 0.9 | V |
| Maximum Instantaneous Reverse Current @ Rated dc Voltage (Note 2) ($T_L = 25^\circ C$) ($T_L = 100^\circ C$) | I_R | 1.0 10 | 1.0 10 | 1.0 10 | mA |

- Lead Temperature reference is cathode lead 1/32" from case.
- Pulse Test: Pulse Width = 300 μs , Duty Cycle = 2.0%.

1N5817, 1N5818, 1N5819

NOTE 1. — DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above $0.1 V_{RWM}$. Proper derating may be accomplished by use of equation (1).

$$T_{A(max)} = T_{J(max)} - R_{\theta JA} P_{F(AV)} - R_{\theta JA} P_{R(AV)} \quad (1)$$

where $T_{A(max)}$ = Maximum allowable ambient temperature
 $T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest)
 $P_{F(AV)}$ = Average forward power dissipation
 $P_{R(AV)}$ = Average reverse power dissipation
 $R_{\theta JA}$ = Junction-to-ambient thermal resistance

Figures 1, 2, and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2).

$$T_R = T_{J(max)} - R_{\theta JA} P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation (1) yields:

$$T_{A(max)} = T_R - R_{\theta JA} P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where $T_J = 125^\circ\text{C}$, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2, and 3 as a difference in the rate of change of the slope in the vicinity of 115°C . The data of Figures 1, 2, and 3 is based upon dc conditions. For use in common rectifier circuits, Table 1 indicates suggested factors for an equivalent dc voltage to use for conservative design, that is:

$$V_{R(equiv)} = V_{in(PK)} \times F \quad (4)$$

The factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

EXAMPLE: Find $T_{A(max)}$ for 1N5818 operated in a 12-volt dc supply using a bridge circuit with capacitive filter such that $I_{DC} = 0.4 \text{ A}$ ($I_{F(AV)} = 0.5 \text{ A}$), $I_{(FM)}/I_{(AV)} = 10$, Input Voltage = $10 V_{(rms)}$, $R_{\theta JA} = 80^\circ\text{C/W}$.

- Step 1. Find $V_{R(equiv)}$. Read $F = 0.65$ from Table 1,
 $\therefore V_{R(equiv)} = (1.41)(10)(0.65) = 9.2 \text{ V}$.
- Step 2. Find T_R from Figure 2. Read $T_R = 109^\circ\text{C}$
 @ $V_R = 9.2 \text{ V}$ and $R_{\theta JA} = 80^\circ\text{C/W}$.
- Step 3. Find $P_{F(AV)}$ from Figure 4. **Read $P_{F(AV)} = 0.5 \text{ W}$
 @ $\frac{I_{(FM)}}{I_{(AV)}} = 10$ and $I_{F(AV)} = 0.5 \text{ A}$.
- Step 4. Find $T_{A(max)}$ from equation (3).
 $T_{A(max)} = 109 - (80)(0.5) = 69^\circ\text{C}$.

**Values given are for the 1N5818. Power is slightly lower for the 1N5817 because of its lower forward voltage, and higher for the 1N5819.

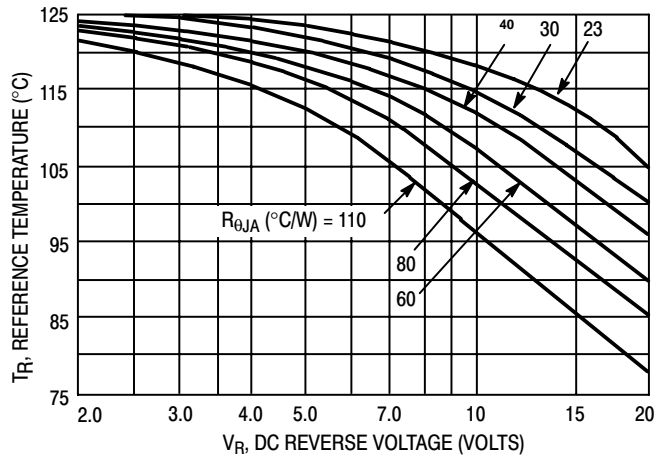


Figure 1. Maximum Reference Temperature 1N5817

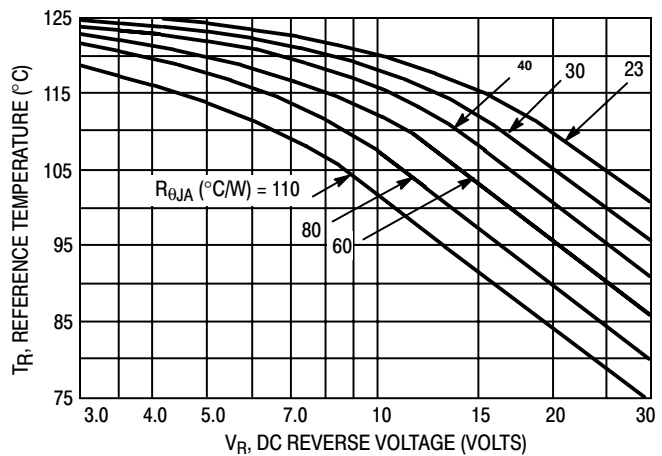


Figure 2. Maximum Reference Temperature 1N5818

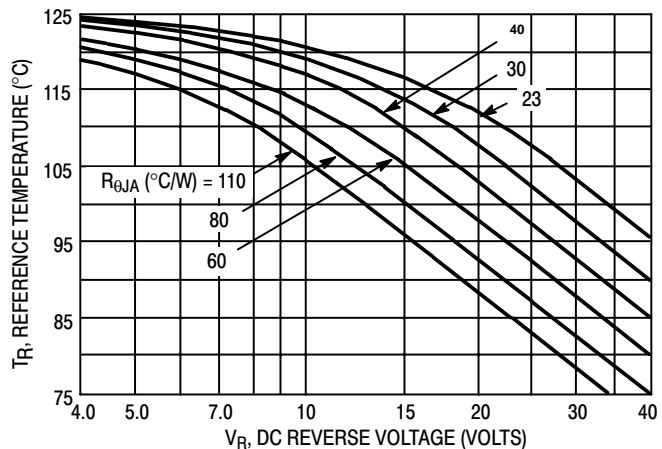


Figure 3. Maximum Reference Temperature 1N5819

Table 1. Values for Factor F

| Circuit | Half Wave | | Full Wave, Bridge | | Full Wave, Center Tapped* † | |
|-------------|-----------|-------------|-------------------|------------|-----------------------------|------------|
| | Resistive | Capacitive* | Resistive | Capacitive | Resistive | Capacitive |
| Sine Wave | 0.5 | 1.3 | 0.5 | 0.65 | 1.0 | 1.3 |
| Square Wave | 0.75 | 1.5 | 0.75 | 0.75 | 1.5 | 1.5 |

*Note that $V_{R(PK)} = 2.0 V_{in(PK)}$.

† Use line to center tap voltage for V_{in} .

1N5817, 1N5818, 1N5819

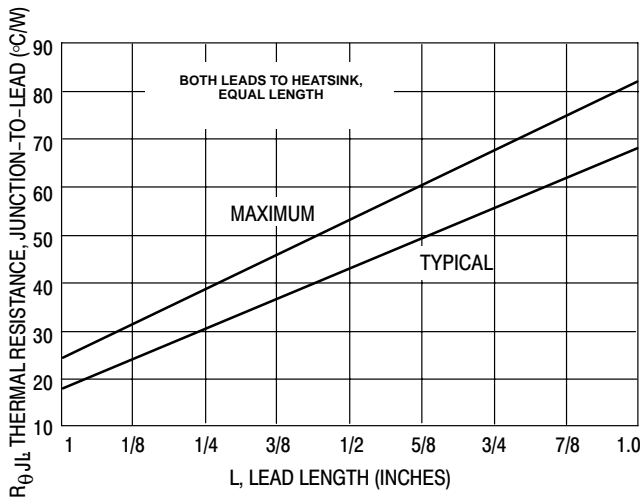


Figure 4. Steady-State Thermal Resistance

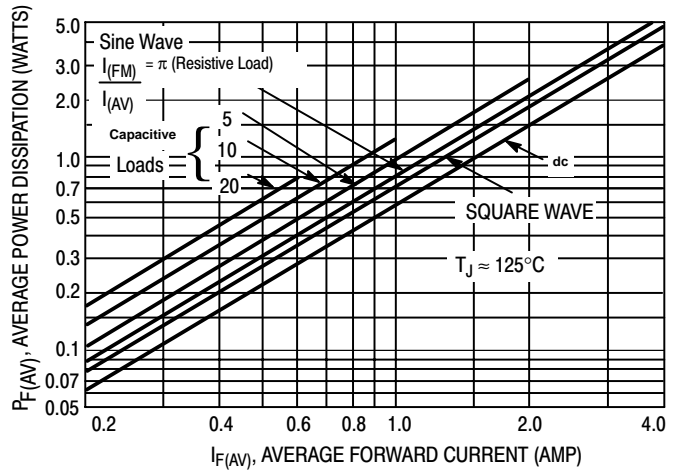


Figure 5. Forward Power Dissipation
1N5817-19

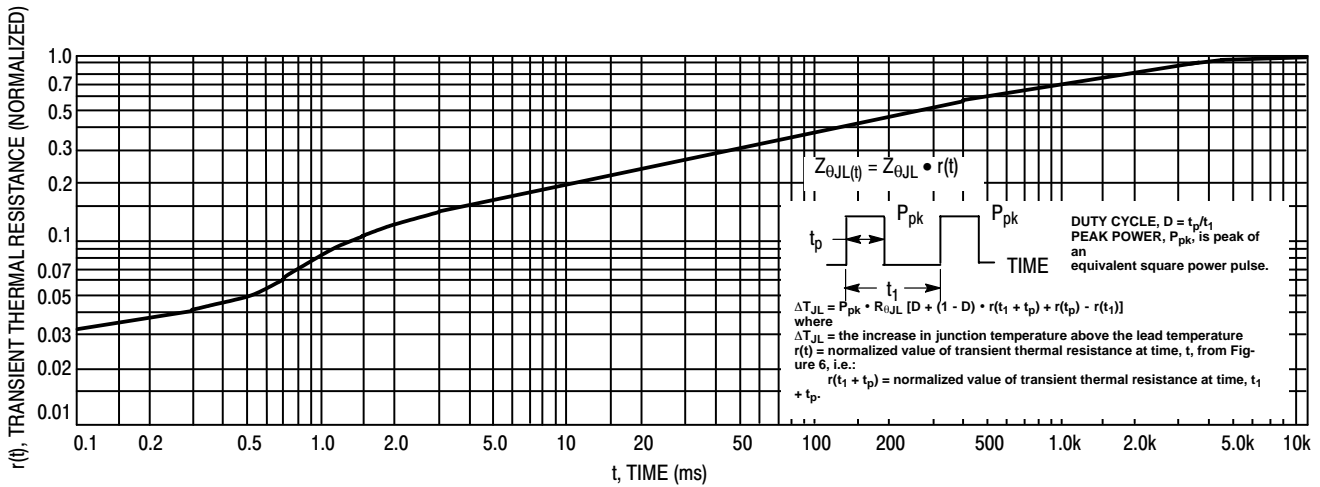



Figure 6. Thermal Response

NOTE 2. — MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering, or in case the tie point temperature cannot be measured.


TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

| Mounting Method | Lead Length, L (in) | | | | $R_{\theta JA}$ |
|-----------------|---------------------|-----|-----|-----|-----------------|
| | 1/8 | 1/4 | 1/2 | 3/4 | |
| 1 | 52 | 65 | 72 | 85 | $^{\circ}C/W$ |
| 2 | 67 | 80 | 87 | 100 | $^{\circ}C/W$ |
| 3 | 50 | | | | $^{\circ}C/W$ |

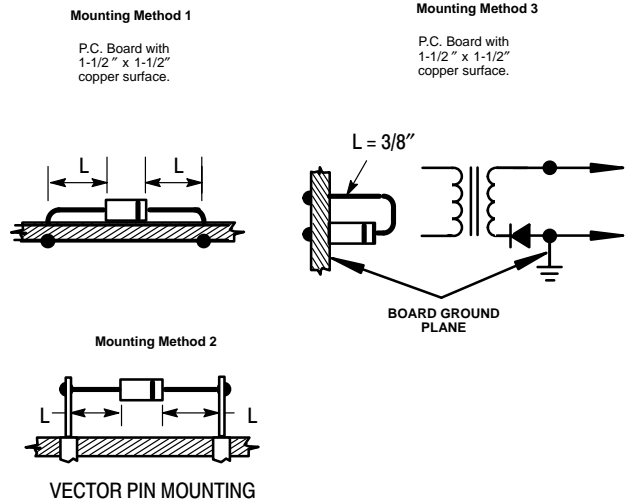

1N5817, 1N5818, 1N5819

NOTE 3. — THERMAL CIRCUIT MODEL
(For heat conduction through the leads)

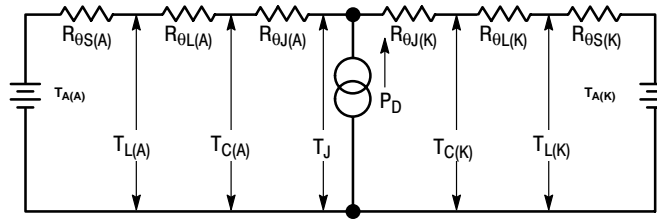

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. For a given total lead length, lowest values occur when one side of the rectifier is brought as close as possible to the heatsink. Terms in the model signify:

T_A = Ambient Temperature T_C = Case Temperature
 T_L = Lead Temperature T_J = Junction Temperature
 $R_{\theta S}$ = Thermal Resistance, Heatsink to Ambient
 $R_{\theta L}$ = Thermal Resistance, Lead to Heatsink
 $R_{\theta J}$ = Thermal Resistance, Junction to Case
 P_D = Power Dissipation

(Subscripts A and K refer to anode and cathode sides, respectively.) Values for thermal resistance components are:

$R_{\theta L} = 100^\circ\text{C/W/in}$ typically and 120°C/W/in maximum
 $R_{\theta J} = 36^\circ\text{C/W}$ typically and 46°C/W maximum.

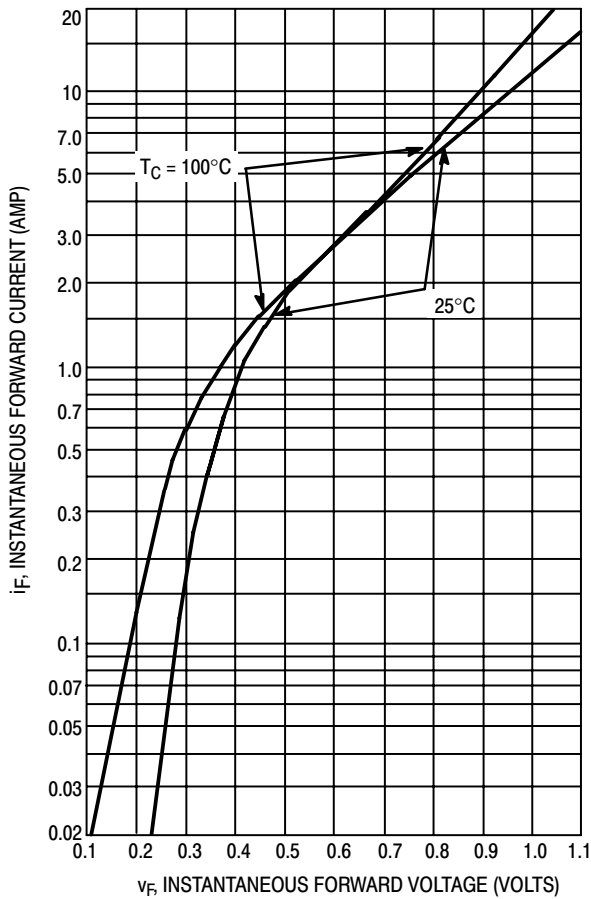


Figure 7. Typical Forward Voltage

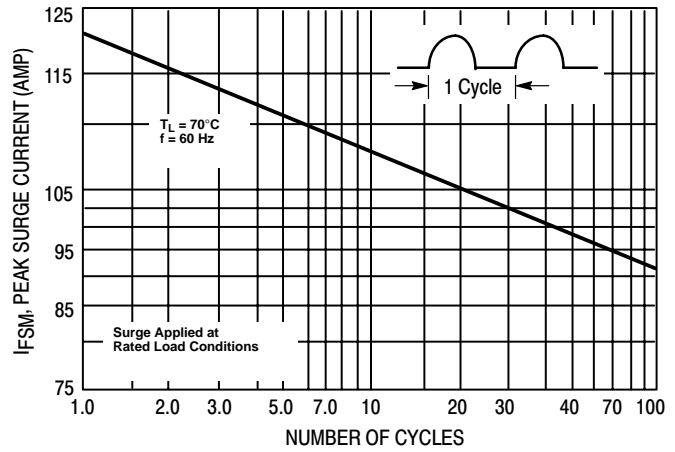


Figure 8. Maximum Non-Repetitive Surge Current

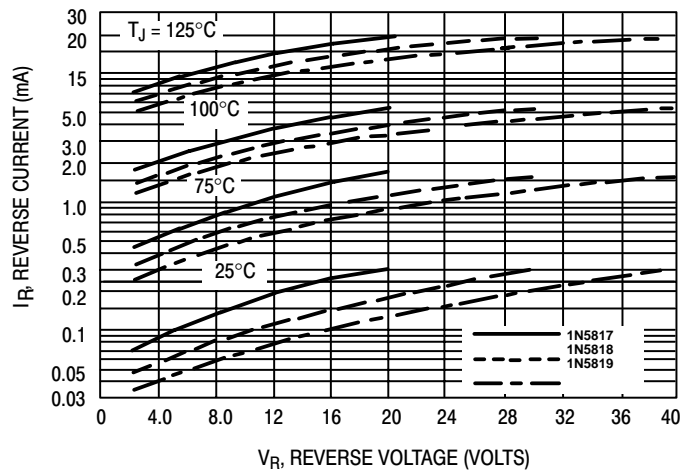


Figure 9. Typical Reverse Current

1N5817, 1N5818, 1N5819

NOTE 4. — HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 10.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss: it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.


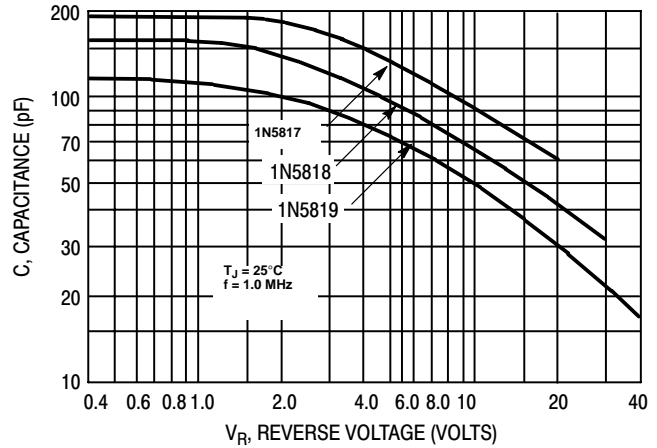


Figure 10. Typical Capacitance

1N5817, 1N5818, 1N5819

PACKAGE DIMENSIONS

AXIAL LEAD, DO-41 CASE 59-10 ISSUE S

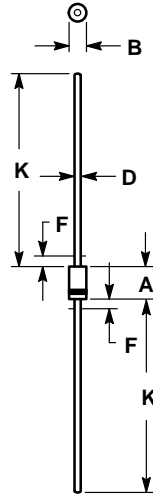

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 59-04 OBSOLETE, NEW STANDARD 59-09.
4. 59-03 OBSOLETE, NEW STANDARD 59-10.
5. ALL RULES AND NOTES ASSOCIATED WITH JEDEC DO-41 OUTLINE SHALL APPLY
6. POLARITY DENOTED BY CATHODE BAND.
7. LEAD DIAMETER NOT CONTROLLED WITHIN F DIMENSION.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.161 | 0.205 | 4.10 | 5.20 |
| B | 0.079 | 0.106 | 2.00 | 2.70 |
| D | 0.028 | 0.034 | 0.71 | 0.86 |
| F | --- | 0.050 | --- | 1.27 |
| K | 1.000 | --- | 25.40 | --- |

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.