

PLCC SOCKETS



822200 SERIES LOW INSERTION FORCE SOCKET

- LOW PROFILE: ONLY 4.7mm HIGH, UNIQUE CONTACT DESIGN PROVIDES LOW INSERTION FORCE
- FOOTPRINT IS THE SAME AS THE DIRECT MOUNTED COMPONENT
- PLASTIC STANDOFFS PROVIDE CLEARANCE FOR HEAT DISSIPATION AND CLEANING OPERATIONS
- VISUAL WINDOWS FOR SOLDERING INSPECTION
- TOP CONTACT SLOTS ALLOW TEST PROBING WITH PLCC IN SITU
- UL & CSA APPROVED, SUPPLIED TAPE AND REEL WITHOUT LOCATING LUGS, AND NOW TUBED

DIMENSIONS AND TAPE AND REEL ORDERING INFORMATION

New Lower Prices!

Part No.	No. contacts	A	B	C	D	E	SQP £ ea.
3-822269-1	20	5.08	5.08	14.35	14.35	9.25	0.26
3-822271-1	28	7.62	7.62	16.89	16.89	11.79	0.30
3-822273-1	32	7.62	10.16	16.89	19.43	†	0.26
3-822275-1	44	12.70	12.70	21.97	21.97	16.87	0.40
3-822277-1	52	15.24	15.24	25.40	25.40	19.41	0.53
3-822279-1	68	20.32	20.32	30.48	30.48	24.48	0.56
3-822281-1	84	25.40	25.40	35.56	35.56	29.57	0.90
822154-1	Extractor tool						9.30

†: 11.79, short side; 14.44, long side.



DIMENSIONS AND TUBED PRODUCT ORDERING INFORMATION

New Lower Prices!

Part No.	No. contacts	A	B	C	D	E	SQP £ ea.
822269-1	20	5.08	5.08	14.35	14.35	9.25	0.55
822271-1	28	7.62	7.62	16.89	16.89	11.79	0.58
822273-1	32	7.62	10.16	16.89	19.43	†	0.63
822275-1	44	12.70	12.70	21.97	21.97	16.87	0.67
822277-1	52	15.24	15.24	25.40	25.40	19.41	0.88
822279-1	68	20.32	20.32	30.48	30.48	24.48	1.12
822281-1	84	25.40	25.40	35.56	35.56	29.57	1.32
822154-1	Extractor tool						9.30

†: 11.79, short side; 14.44, long side.

DIMENSIONS AND TYPICAL FOOTPRINT

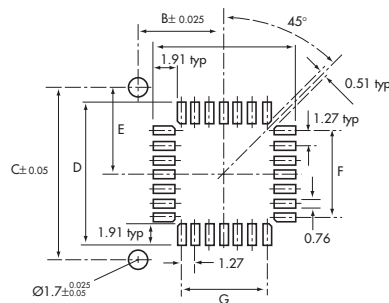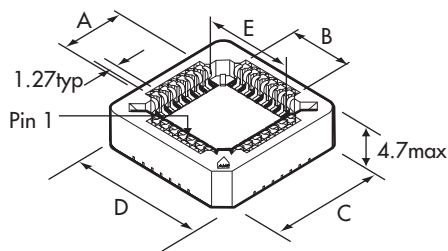

The latest comprehensive data to fully support these parts is readily available.

TAPE & REEL SPECIFICATIONS

No. Cts.	Reel Size	Tape Width	Quantity
20, 28	350mm	24mm	400
32	350mm	32mm	400
40, 52	350mm	44mm	250
68	350mm	44mm	250
84	350mm	56mm	250

SQP – SMALL QUANTITY PRICES

A typical unit price for a quantity of 100 pieces. It will vary (up or down) depending on the time, order value etc. Call us for your update.