



## VOLTAGE COMPARATORS

- MAXIMUM INPUT CURRENT : 150nA
- MAXIMUM OFFSET CURRENT : 20nA
- DIFFERENTIAL INPUT VOLTAGE RANGE :  $\pm 30V$
- POWER CONSUMPTION : 135mW AT  $\pm 15V$
- SUPPLY VOLTAGE : +5V TO  $\pm 15V$
- OUTPUT CURRENT : 50mA

### DESCRIPTION

The LM111, LM211, LM311 are voltage comparators that have low input currents.

They are also designed to operate over a wide range of supply voltages : from standard  $\pm 15V$  operational amplifier supplies down to the single +5V supply used for IC logic.


Their output is compatible with RTL-DTL and TTL as well as MOS circuits and can switch voltages up to +50V at outputs currents as high as 50mA.

### ORDER CODE


Part Number	Temperature Range	Package	
		N	D
LM111	-55°C, +125°C	•	•
LM211	-40°C, +105°C	•	•
LM311	0°C, +70°C	•	•
<b>Example : LM311D</b>			

N = Dual in Line Package (DIP)


D = Small Outline Package (SO) - also available in Tape & Reel (DT)

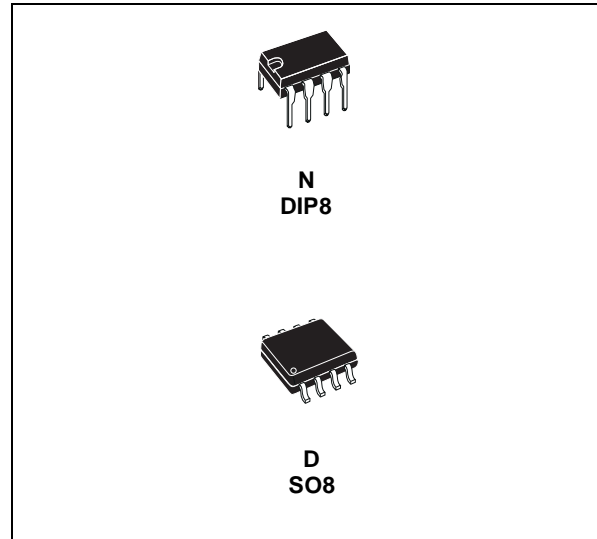

### PIN CONNECTIONS (top view)

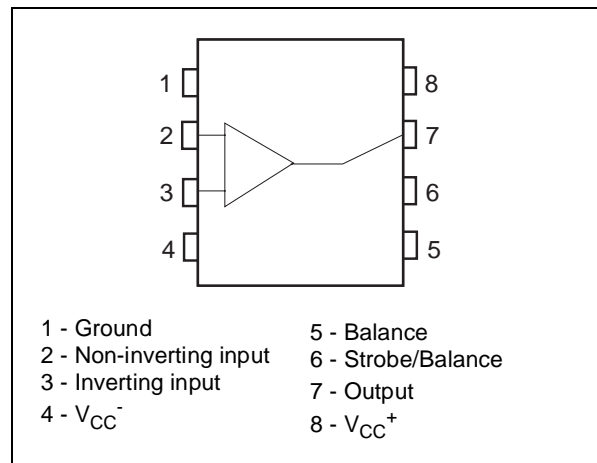

**SCHEMATIC DIAGRAM**

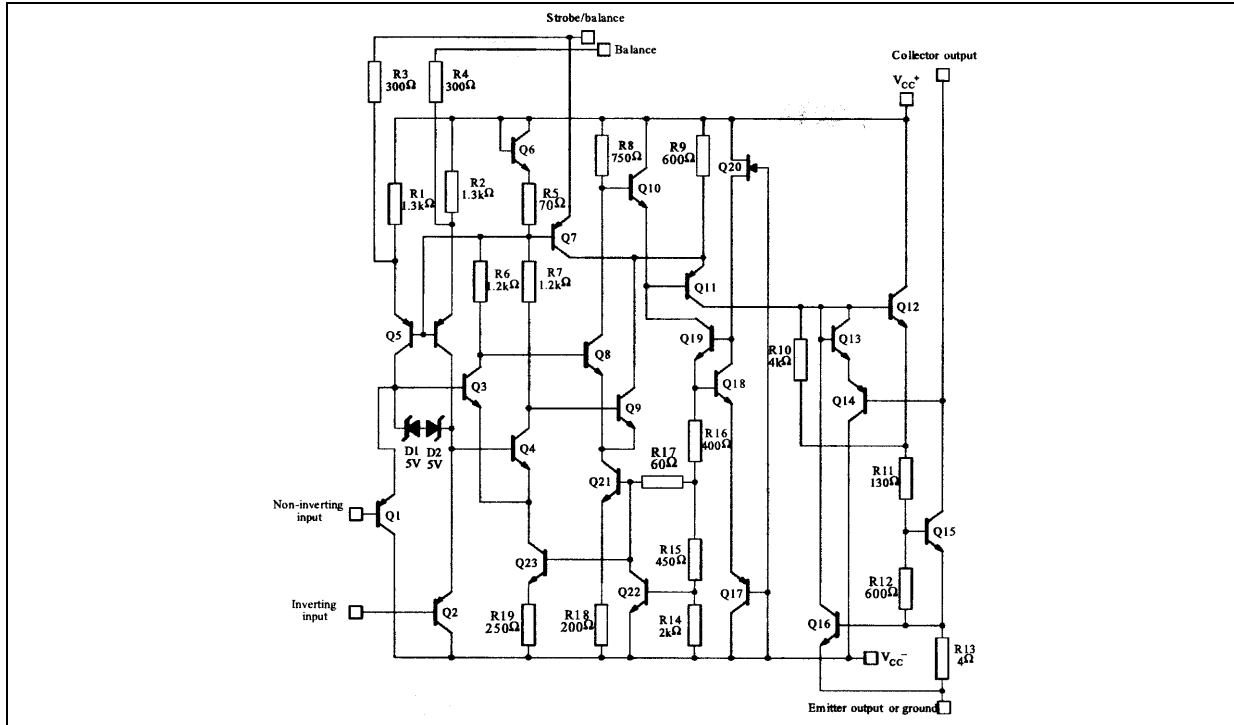

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit	
$V_{CC}$	Supply Voltage	36	V	
$V_{id}$	Differential Input Voltage	±30	V	
$V_i$	Input Voltage <sup>1)</sup>	±15	V	
$V_{(1-4)}$	Ground to Negative Supply Voltage	30	V	
$V_{(7-4)}$	Output to Negative Supply Voltage	LM111-LM211 LM311	50 40	V
	Output Short-Circuit Duration	10	s	
	Voltage at strobe pin	$V_{CC} + -5$	V	
$P_d$	Power Dissipation <sup>2)</sup>	DIP8 SO8	1250 710	mW
$T_j$	Junction Temperature	+150	°C	
$T_{stg}$	Storage Temperature Range	-65 to +150	°C	






1. This rating applies for ±15V supplies. The positive input voltage limit is 30V above the negative. The negative input voltage is equal to the negative supply voltage or 30V below the positive supply, whichever is less.






2.  $P_d$  is calculated with  $T_{amb} = +25^\circ\text{C}$ ,  $T_j = +150^\circ\text{C}$  and  $R_{thja} = 100^\circ\text{C/W}$  for DIP8 package  
 $R_{thja} = 175^\circ\text{C/W}$  for SO8 package

**OPERATING CONDITIONS**


Symbol	Parameter	Value	Unit	
$V_{CC}$	Supply Voltage	5 to ±15	V	
$T_{oper}$	Operating Free-Air Temperature range	LM111 LM211 LM311	-55 to +125 -40 to +105 0 to +70	°C



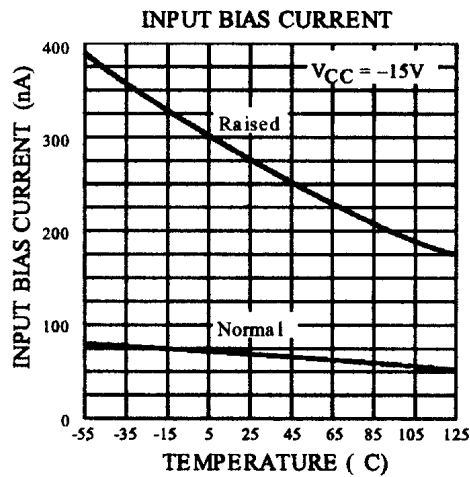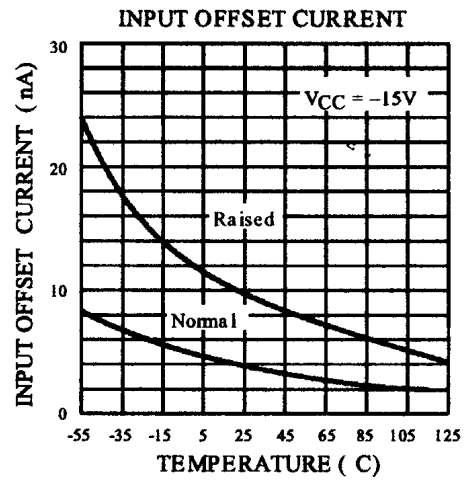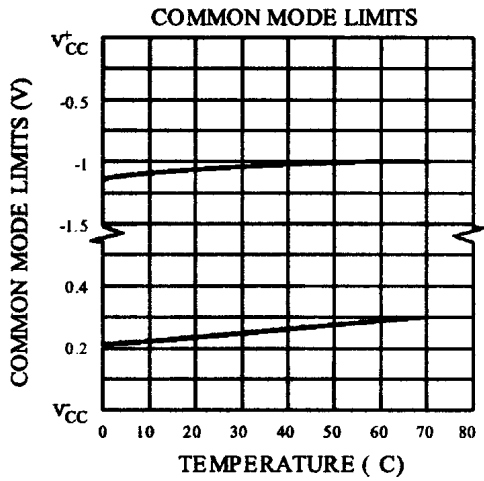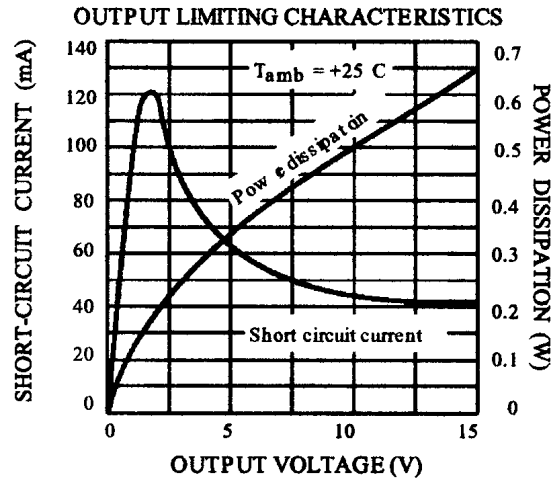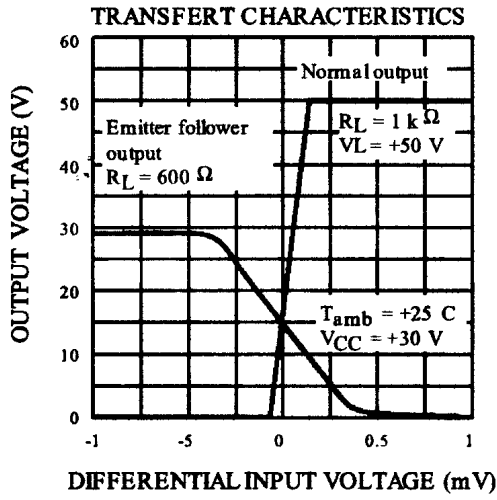


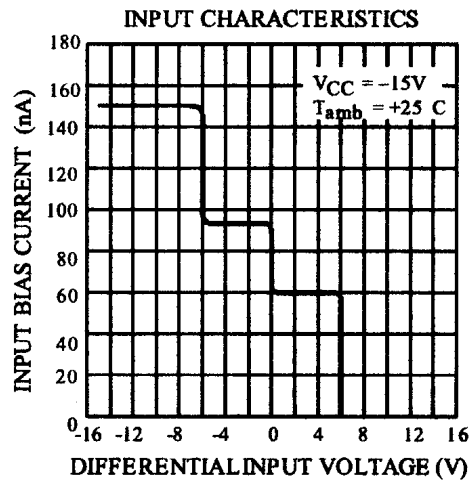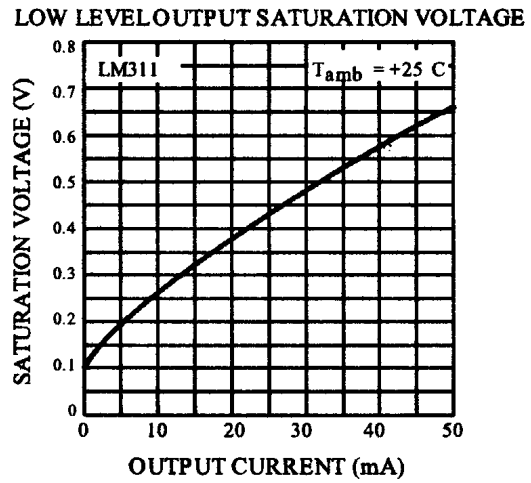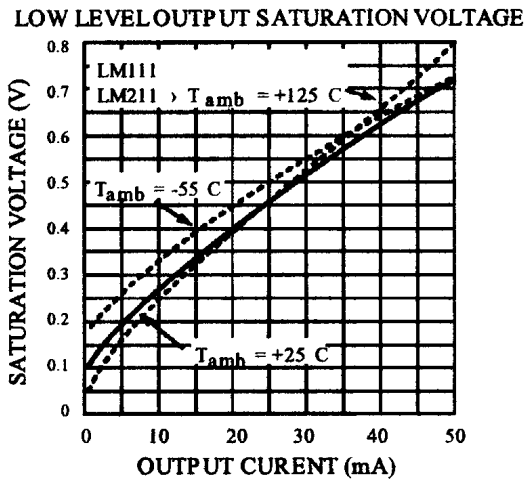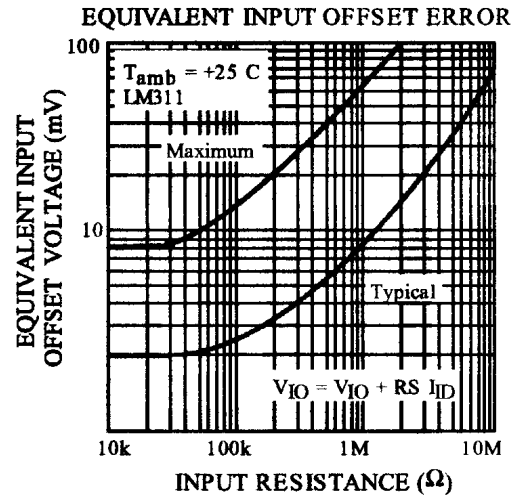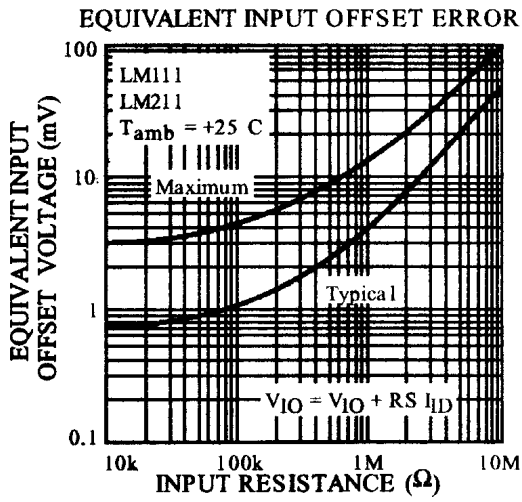


RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

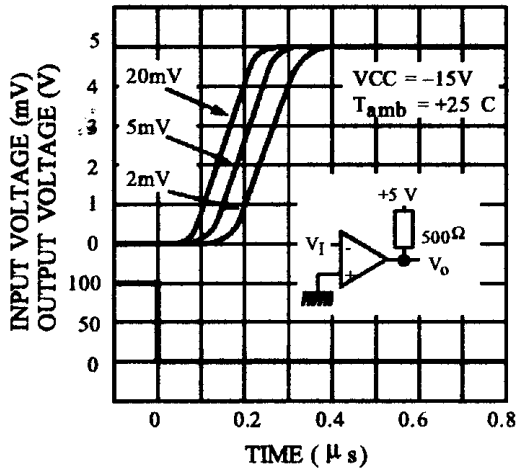


RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

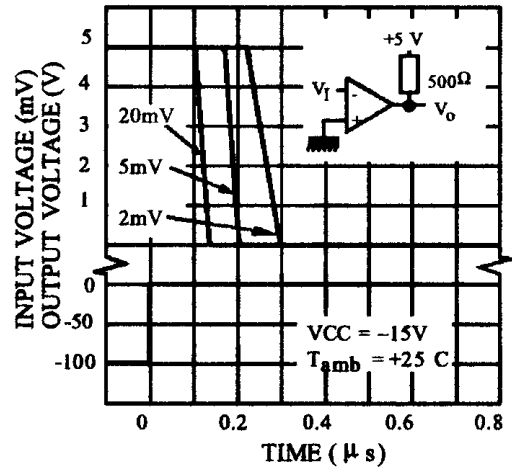

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

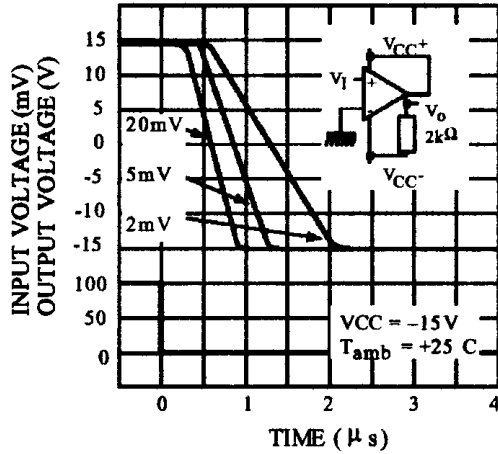


RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

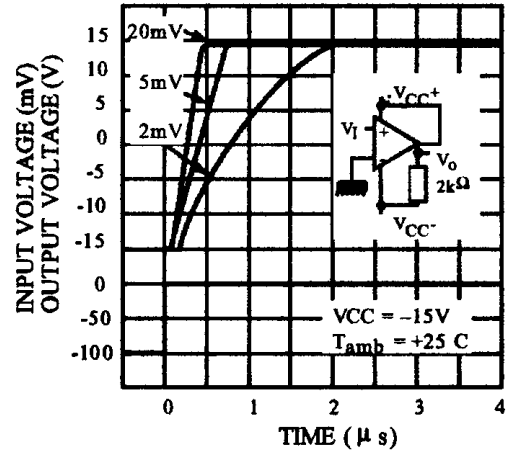


TYPICAL APPLICATIONS


CRYSTAL OSCILLATOR

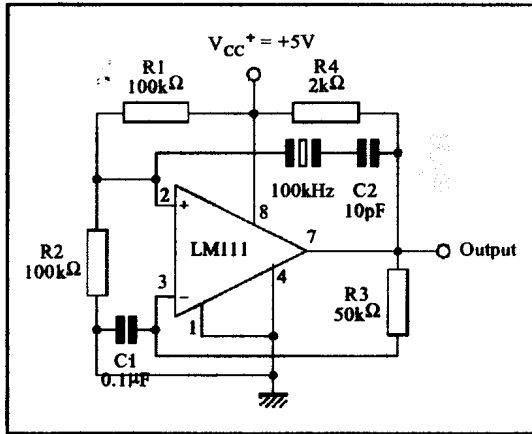


100KHz FREE RUNNING MULTIVIBRATOR

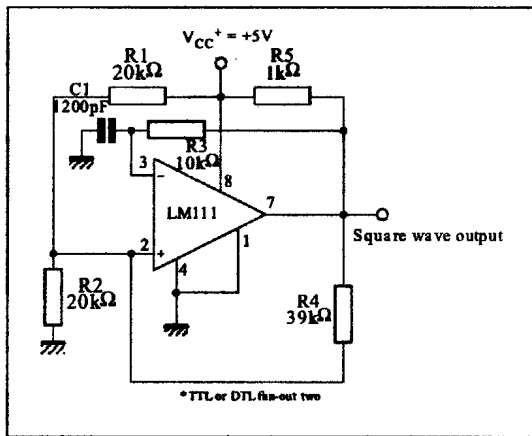


AUXILIARY CIRCUITS

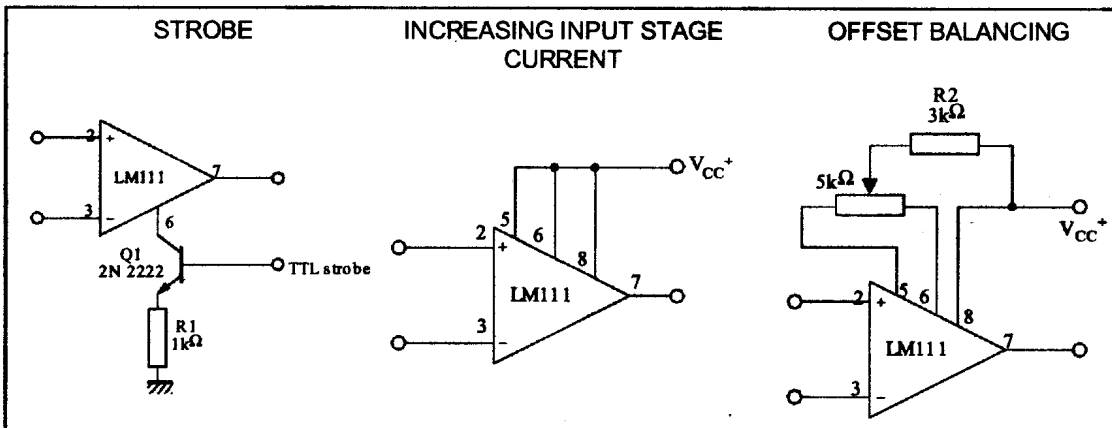


LOW VOLTAGE ADJUSTABLE REFERENCE SUPPLY

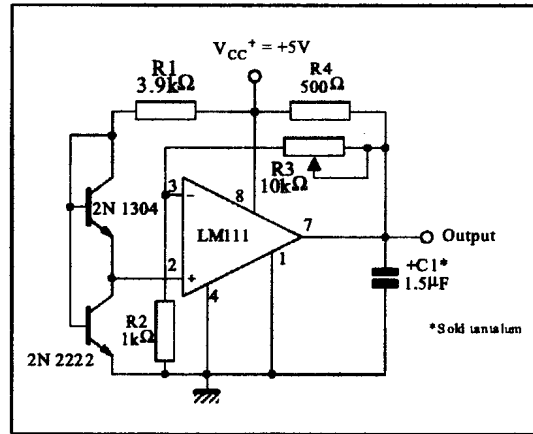

TTL INTERFACE WITH HIGH LEVEL LOGIC

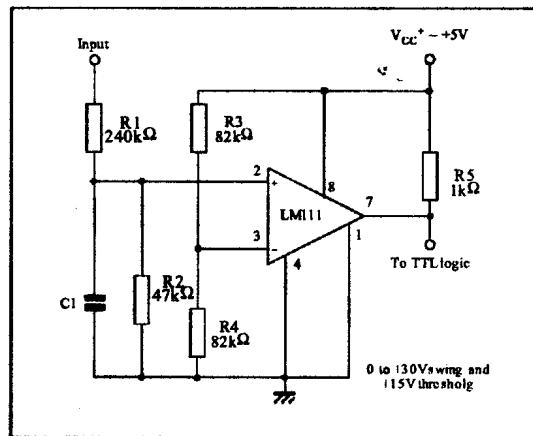


**PACKAGE MECHANICAL DATA**  
8 PINS - PLASTIC DIP

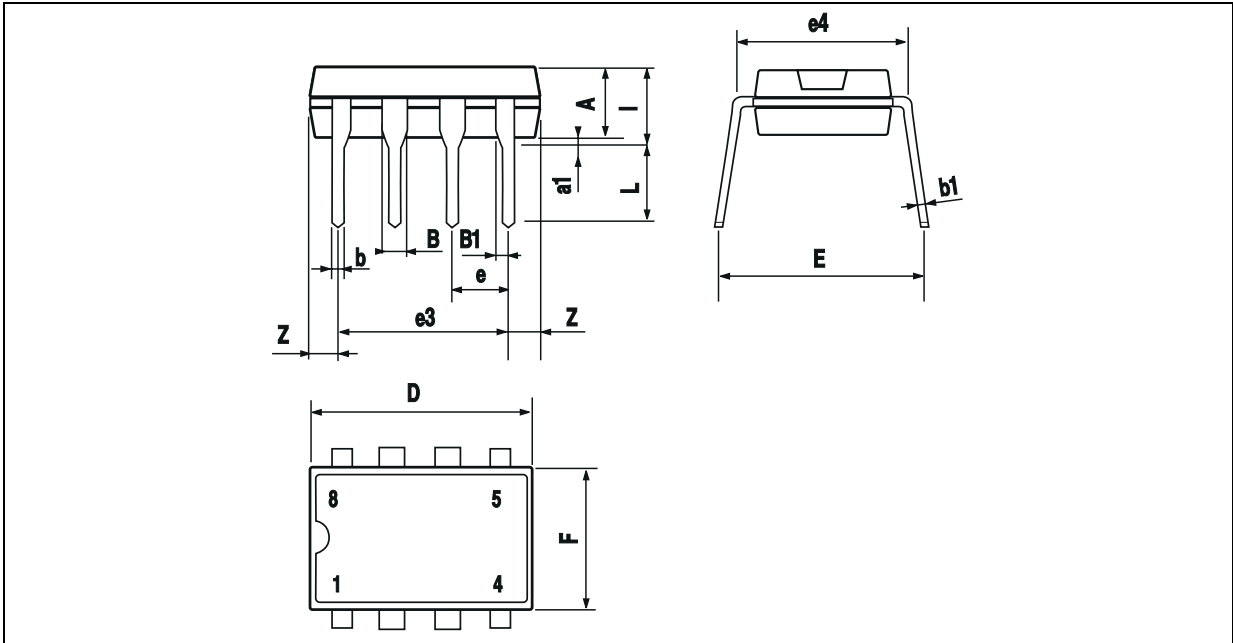

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.32			0.131	
a1	0.51			0.020		
B	1.15		1.65	0.045		0.065
b	0.356		0.55	0.014		0.022
b1	0.204		0.304	0.008		0.012
D			10.92			0.430
E	7.95		9.75	0.313		0.384
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			6.6			0.260
i			5.08			0.200
L	3.18		3.81	0.125		0.150
Z			1.52			0.060



**PACKAGE MECHANICAL DATA**  
8 PINS - PLASTIC MICROPACKAGE (SO)

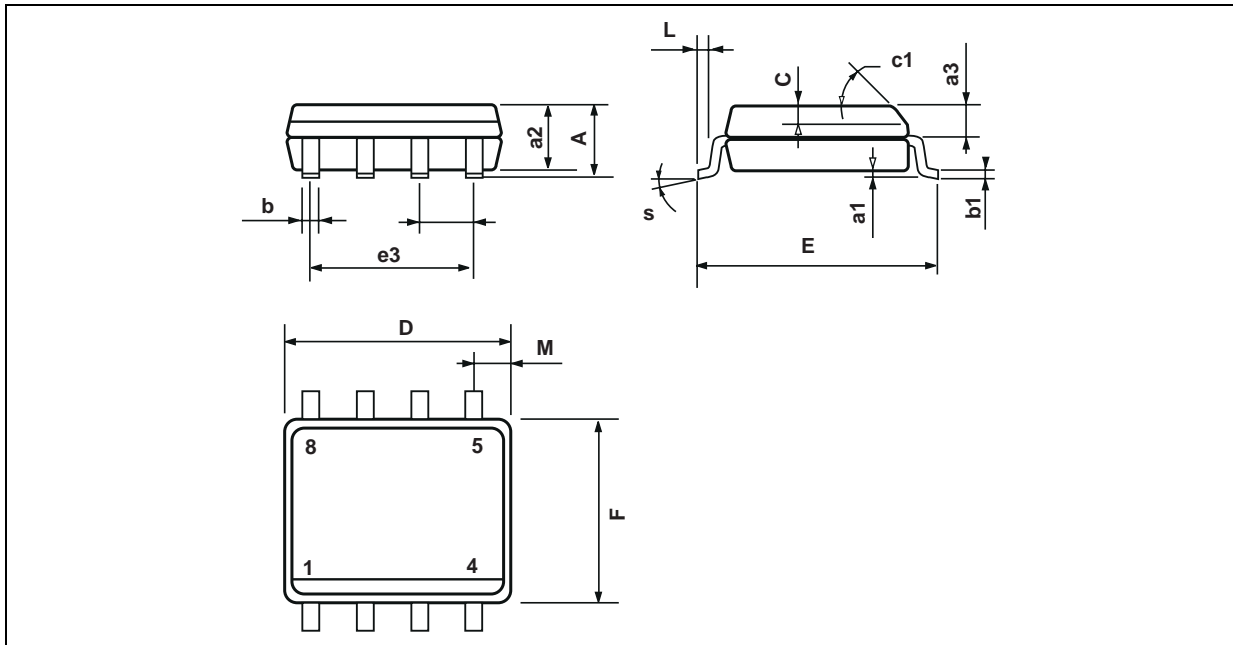

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
a3	0.65		0.85	0.026		0.033
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.020
c1	45° (typ.)					
D	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.150		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max.)					

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>