

2SA1693

Silicon PNP Epitaxial Planar Transistor (Complement to type 2SC4466)

Application : Audio and General Purpose

■ Absolute maximum ratings (Ta=25°C)

| Symbol | Ratings | Unit |
|------------------|--------------------------|------|
| V _{CB0} | -80 | V |
| V _{CEO} | -80 | V |
| V _{EB0} | -6 | V |
| I _C | -6 | A |
| I _B | -3 | A |
| P _C | 60(T _C =25°C) | W |
| T _J | 150 | °C |
| T _{stg} | -55 to +150 | °C |

■ Electrical Characteristics (Ta=25°C)


| Symbol | Conditions | Ratings | Unit |
|----------------------|---|---------|------|
| I _{CB0} | V _{CB} =-80V | -10max | μA |
| I _{EB0} | V _{EB} =-6V | -10max | μA |
| V _{(BR)CEO} | I _C =-50mA | -80min | V |
| h _{FE} | V _{CE} =-4V, I _C =-2A | 50min* | |
| V _{CE(sat)} | I _C =-2A, I _B =-0.2A | -1.5max | V |
| f _T | V _{CE} =-12V, I _E =0.5A | 20typ | MHz |
| COB | V _{CB} =-10V, f=1MHz | 150typ | pF |

*h_{FE} Rank ○(50to 100), P(70to 140), Y(90to 180)


■ Typical Switching Characteristics (Common Emitter)

| V _{CC} (V) | R _L (Ω) | I _C (A) | V _{BB1} (V) | V _{BB2} (V) | I _{B1} (A) | I _{B2} (A) | t _{on} (μs) | t _{stg} (μs) | t _f (μs) |
|---------------------|--------------------|--------------------|----------------------|----------------------|---------------------|---------------------|----------------------|-----------------------|---------------------|
| -30 | 10 | -3 | -10 | 5 | -0.3 | 0.3 | 0.18typ | 1.10typ | 0.21typ |


External Dimensions MT-100(TO3P)

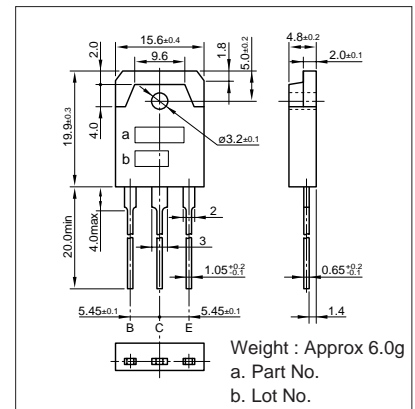


I_C-V_{CE} Characteristics (Typical)

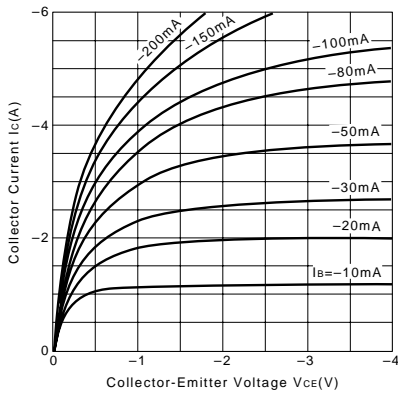


V_{CE(sat)}-I_B Characteristics (Typical)

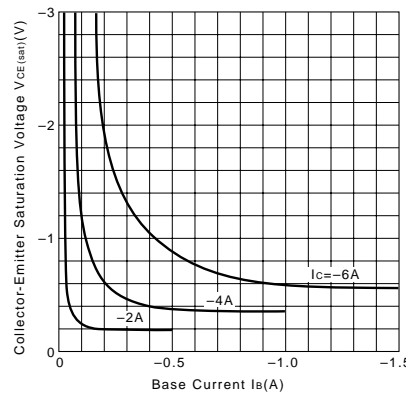


I_C-V_{BE} Temperature Characteristics (Typical)

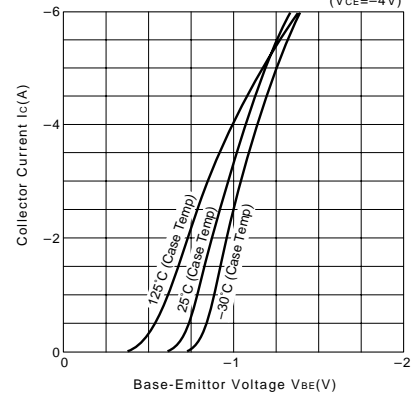


h_{FE}-I_C Characteristics (Typical)

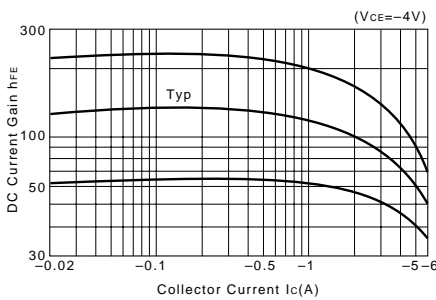


h_{FE}-I_C Temperature Characteristics (Typical)

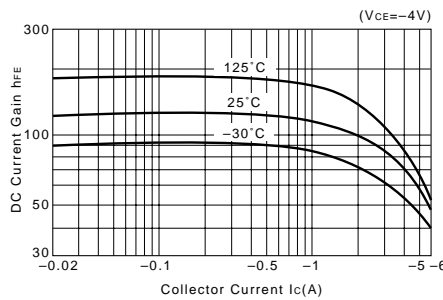


θ_{j-a}-t Characteristics

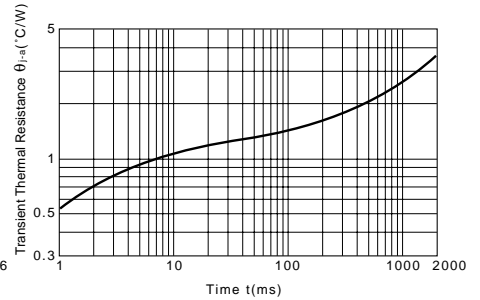

f_T-I_E Characteristics (Typical)

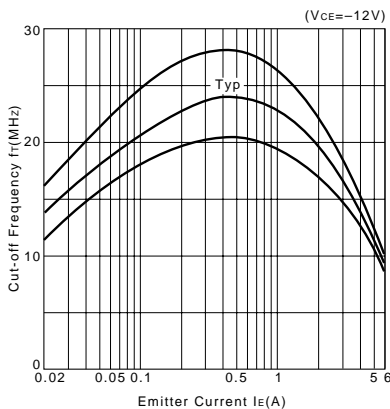

Safe Operating Area (Single Pulse)

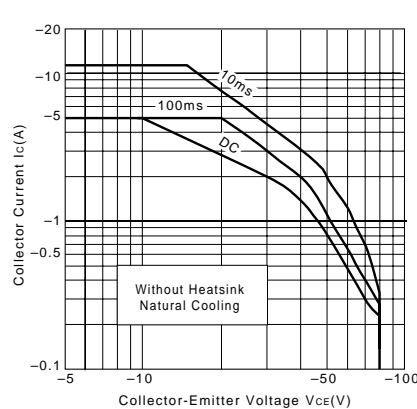

P_C-T_a Derating

