


## Molded and Insulated Wirewound Power Resistors Axial Leads




### FEATURES

- 1 W to 10 W
- NF C 83-210
- GAM T1 LNZ
- Excellent stability = typical drift  $\pm 1\%$  after 2000 h
- High power = up to 10 W (25 °C)
- Low ohmic values = 0.01  $\Omega$  available
- Electrical insulation
- Climatic protection

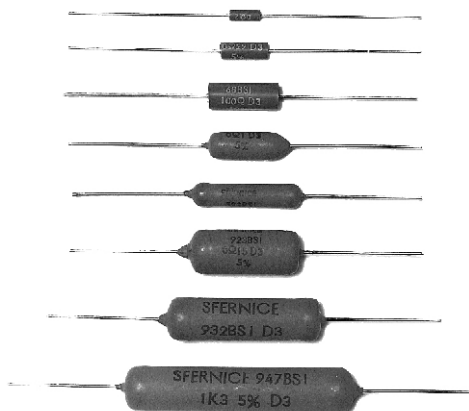

BSI style resistors comply with the most stringent requirements of the NF C 83-210. 8 styles covering the power range from 1 W to 10 W

### DIMENSIONS in millimeters

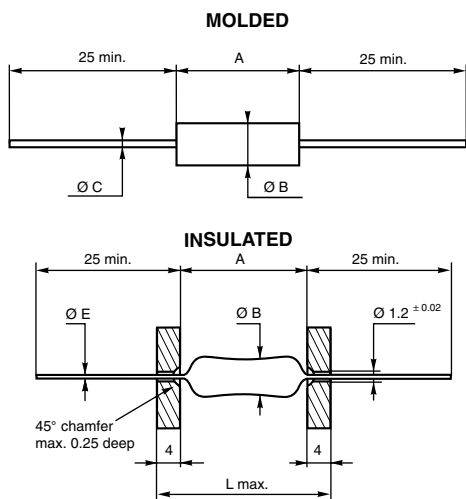

DIMENSIONS in millimeters					
PROTECTION	MOLDED				
Style	58 BSI	63 BSI	68 BSI		
Dim. A	6.5 ± 0.2	10 ± 0.2	15 ± 0.5		
Ø B	2.4 ± 0.1	3.7 ± 0.1	5.6 ± 0.2		
Ø C ± 0.1	0.6		0.8		
Weight in g	0.3	0.45	1.3		
PROTECTION	INSULATED				
Style	516 BSI	523 BSI	923 BSI	932 BSI	947 BSI
Dim. A	16 ± 2	23 ± 2	23 ± 2	32 ± 2	47 ± 2
Ø B	5 ± 1	5 ± 1	9 ± 1	9 ± 1	9 ± 1
Ø C ± 0.1	0.8				
Weight in g	1.6	2.5	6	7.5	10

TECHNICAL SPECIFICATIONS										
VISHAY SFERNICE MODEL AND STYLE	58 BSI	63 BSI	68 BSI	516 BSI	523 BSI	923 BSI	932 BSI	947 BSI		
NF C 83-210 Conformity	RP 8	RP 7	RP 4	-	-	RP 5	-	RP 6		
LNZ	yes	yes	yes	-	-	yes	-	yes		
GAM-T-1	yes	yes	yes	-	-	yes	-	yes		
Power Rating at + 25 °C	1 W	2 W	3 W	4 W	5 W	6 W	8 W	10 W		
Ohmic Range	0.1 $\Omega$ 2 k $\Omega$	0.025 $\Omega$ 4 k $\Omega$	0.01 $\Omega$ 15 k $\Omega$	0.01 $\Omega$ 20 k $\Omega$	0.015 $\Omega$ 40 k $\Omega$	0.02 $\Omega$ 60 k $\Omega$	0.035 $\Omega$ 100 k $\Omega$	0.06 $\Omega$ 150 k $\Omega$		
Ohmic Range in Relation to	$\pm 100$ ppm/°C	$\pm 0.5\%$ $\pm 5\%$	0.1 $\Omega$ 2 k $\Omega$	0.1 $\Omega$ 20 k $\Omega$	0.1 $\Omega$ 40 k $\Omega$	0.1 $\Omega$ 60 k $\Omega$	0.1 $\Omega$ 100 k $\Omega$	0.1 $\Omega$ 150 k $\Omega$		
Temperature Coefficient	$\pm 300$ ppm/°C	$\pm 1\%$ $\pm 5\%$	-	0.025 $\Omega$ < 0.1 $\Omega$	0.01 $\Omega$ < 0.1 $\Omega$	0.01 $\Omega$ < 0.1 $\Omega$	0.015 $\Omega$ < 0.1 $\Omega$	0.02 $\Omega$ < 0.1 $\Omega$	0.035 $\Omega$ < 0.1 $\Omega$	0.06 $\Omega$ < 0.1 $\Omega$
Limiting Element Voltage	50 V	120 V	200 V	200 V	250 V	300 V	500 V	750 V		




Molded and Insulated Wirewound Power Resistors Axial Leads


Vishay Sfernice

PERFORMANCE				
TESTS	CONDITIONS	REQUIREMENTS		TYPICAL VALUES AND DRIFTS
		MIL-R-26 E	NF C 83-210	
Dielectric W/s Voltage	1000 V <sub>RMS</sub> for 923... 947 500 V <sub>RMS</sub> for 58... 523	± (0.1 % + 0.05 Ω)	-	± (0.1 % + 0.05 Ω)
Short Time Overload	5 Pn/5 s for Pn < 5 W 10 Pn/5 s for Pn ≥ 5 W	± (0.2 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.1 % + 0.05 Ω)
Climatic Sequence	NF C 83-210 fasc. 19 A - 55 °C/+ 200 °C 5 cycles	-	± 0.5 % + 0.05 Ω Insulation R > 100 MΩ	± (0.3 % + 0.05 Ω) Ins. resistance > 10 <sup>3</sup> MΩ
Humidity (Steady State)	NF C 83-210 fasc. 3 A 56 days 95 % R.H.	-	± 0.5 % + 0.05 Insulation R > 100 M	± (0.3 % + 0.05) Ins. resistance > 10 <sup>3</sup> MΩ
Thermal Shock	Load at 100 % P followed by cold temp. exposure at - 55 °C	± (0.2 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.1 % + 0.05 Ω)
Vibration	MIL-STD-202 Method 204 - Test D: 20 g 10/2000 Hz	± (0.1 % + 0.05 Ω)	± 0.25% + 0.05 Ω	± (0.05 % + 0.05 Ω)
Load Life	MIL-STD-202 Method 108PR 2000 h	± (0.5 % + 0.05 Ω)	± 0.5% + 0.05 Ω Insulation R ≥ 1 GΩ	± (1 % + 0.05 Ω)
Moisture Resistance	MIL-STD-202 Method 106	± (0.2 % + 0.05 Ω) Insulation resistance > 100 MΩ	-	± (1 % + 0.05 Ω) Ins. resistance > 10 <sup>3</sup> MΩ
High Temperature	250 h at + 275 °C	± (0.5 % + 0.05 Ω)	± 0.5 % + 0.05 Ω Insulation R ≥ 1 GΩ	± (0.3 % + 0.05 Ω)
Shock	MIL-STD-202 100 g Method 205 - Test C	± (0.1 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.05 % + 0.05 Ω)

POWER RATING CHART

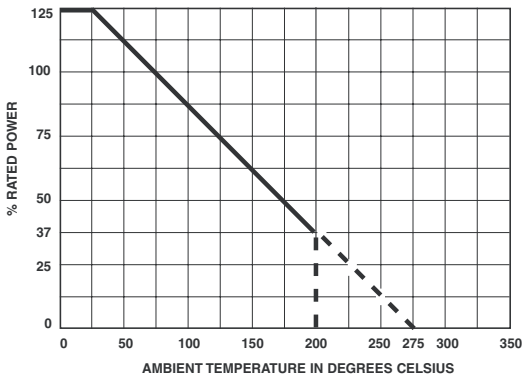

TEMPERATURE RISE

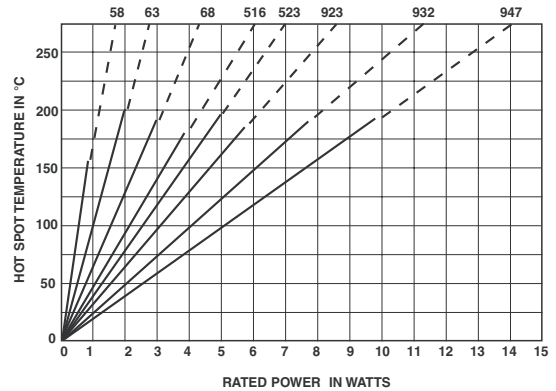

MARKING

GEKA trademark, model, style, nominal resistance (in Ω), tolerance (in %), manufacturing date. Because of lack of space, small styles are marked with ohmic value (in Ω), and tolerance (in %) only.

ORDERING INFORMATION						
BSI	63	U22	2 %	± 100 ppm/°C	TR300	e1
MODEL	STYLE	OHMIC VALUE	TOLERANCE	TEMPERATURE COEFFICIENT	PACKING	LEAD (Pb)-FREE

SAP PART NUMBERING GUIDELINES				
BSI	063	R2200	G	R22
MODEL	STYLE	OHMIC VALUE	TOLERANCE	PACKING



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.